

亮白設計  
Shiny White Color



# 全線榮獲 1 級能源標籤 Grade 1 Energy Label


## R410A 環保雪種 R410A Green Refrigerant

R410A 環保雪種對臭氧層的破壞率為“0”，讓您享受環保又舒適的生活。  
R410A environmental-friendly refrigerant is harmless to the ozone layer that makes your life more pleasant and comfortable.




## 環保防銹藍塗層 Blue Rust-Protective Coating

冷卻器備有環保防銹藍塗層，加強防銹及防霉效能，令機件更持久耐用。  
Thanks to the Blue Rust-Protective Coating on the condenser, the unit is highly resistant to corrosion and fungus, thus ensuring a longer life span.



## 四面送風系統 4-Way Airflow System

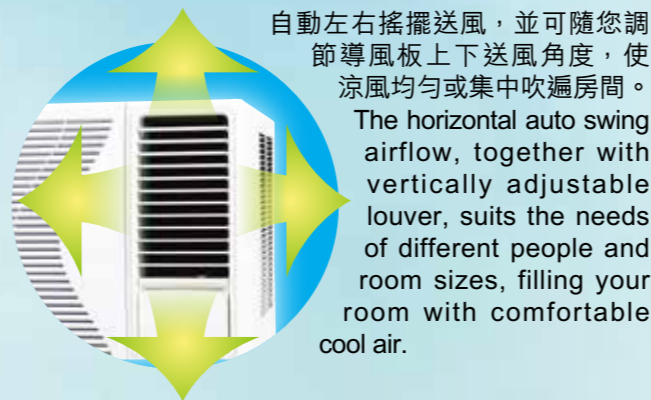

自動左右搖擺送風，並可隨您調節導風板上下送風角度，使涼風均勻或集中吹遍房間。  
The horizontal auto swing airflow, together with vertically adjustable louver, suits the needs of different people and room sizes, filling your room with comfortable cool air.

## 特長送風距離 Long Distance Airing

菱機窗口式冷氣機採用旋轉式壓縮器，提供強勁冷卻效能，操作加倍寧靜，配合特大直徑風葉，遠距離送風，適合本地居室環境使用。  
Equipped with rotary compressor and larger fan blades, RYOBISHI Window Type Air Conditioners feature powerful cooling, quiet operation and long distance airing.




## 方便拆洗過濾網 Easy-to-Clean Filter

簡單打開面板，便能輕易拉出過濾網，清洗更輕鬆容易。  
The filter can be easily pulled off for cleaning after opening the grille.

## 兒茶素靜電過濾網 Catechin Deodorizing Filter

兒茶素靜電過濾網內含提煉自天然綠茶的「兒茶素」，有助防止細菌和病毒繁殖，使其失去活性，從而發揮高效抗菌作用，可助過濾空氣中的微細塵埃，消除難聞煙味及其他污染物。  
The Catechin Deodorizing Filter contains “Catechin” extracted from natural green tea. With superb anti-bacterial effect, it helps inhibit the activity of bacteria and viruses, preventing them from breeding. It can remove tenuous dust, odors like cigarette, and other contaminants in the air.

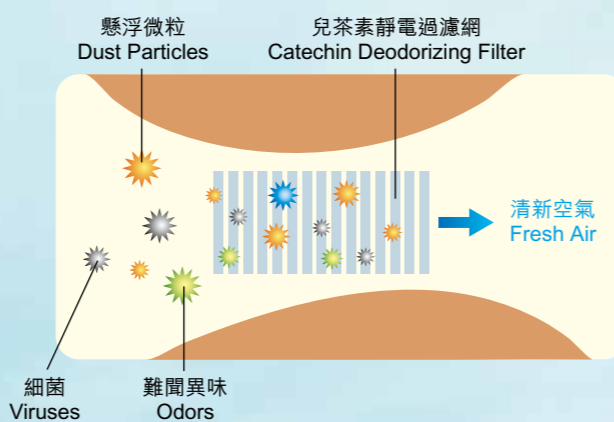

## 規格一覽 Specifications

型號 Model	RB-07GP	RB-09GP	RB-12GP	RB-18GP	RB-24GP	
製冷能力 <sup>△</sup> Cooling Capacity <sup>△</sup>	kW 7,510	2.64 9,010	3.5 11,940	5.3 18,080	6.6 22,520	
相位 Phase	單相 Single					
電壓 Voltage	伏特 V 220					
頻率 Frequency	赫茲 Hz 50					
運行電流 Running Current	安培 A	3.90	4.40	5.59	8.45	11.9
輸入電量 Input Power	瓦特 W	790	940	1,230	1,860	2,430
能源效率值 COP	W/W	2.78	2.81	2.85	2.85	2.72
室內空氣流量 Indoor Air Circulation	立方米 / 分鐘 m <sup>3</sup> /min	5.83	5.83	8.00	11.67	15.50
除濕能力 Dehumidifying Volume	公升 / 小時 L/hr	0.8	1.15	1.3	2.0	2.5
尺寸 Dimensions	高 (毫米 / 吋) Height (mm/inch)	350 / 13.78	350 / 13.78	375 / 14.76	428 / 16.85	428 / 16.85
	闊 (毫米 / 吋) Width (mm/inch)	450 / 17.72	450 / 17.72	560 / 22.05	660 / 25.98	660 / 25.98
	深 (毫米 / 吋) Depth (mm/inch)	580 / 22.84	580 / 22.84	668 / 26.30	700 / 27.56	770 / 30.32
淨重 Net Weight	公斤 kg	30	34	45	58	72

## 特點一覽 Features

- 兒茶素靜電過濾網  
Catechin Deodorizing Filter
- 環保防銹藍塗層  
Blue Rust-Protective Coating
- 旋轉式壓縮機  
Rotary Compressor
- 四面送風系統  
4-Way Airflow System
- 自動左右搖擺送風系統  
Horizontal Auto Air Swing System
- 方便拆洗過濾網  
Easy-to-Clean Filter

<sup>△</sup> ISO 5151 測試條件 ISO 5151 Test Conditions:  
製冷 Cooling - 室內 Indoor 27 °C DB / 19 °C WB ; 室外 Outdoor 35 °C DB / 24 °C WB。  
註：DB (乾球溫度)，WB (濕球溫度)

\* 製冷能力以 kW 為計算標準。  
Cooling capacity is measured in kW  
\* 上列型號符合國際安全標準 The above models comply with the international safety standards:  
IEC 60335-1, IEC 60335-2-40, IEC 62233  
\* 設計和規格如有更改，恕不另行通知。  
Designs and specifications are subject to change without prior notice.

# 1 級 GP 環保通用系列 Grade 1 Energy Label Basic Green Type



## RYOBISHI 菱機

三菱電機菱機空調·影像設備(香港)有限公司  
Mitsubishi Electric Ryoden Air-Conditioning & Visual Information Systems (Hong Kong) Ltd.

辦事處及陳列室 Office & Showroom:  
香港九龍九龍灣宏光道 39 號宏天廣場 9 樓 電話 Tel: (852) 2510 1505  
9/F, Skyline Tower, 39 Wang Kwong Road, Kowloon Bay, Kowloon, Hong Kong  
維修服務中心 Service Centres:  
香港 香港九龍九龍灣臨樂街 8 號商業廣場 7 樓 電話 Tel: (852) 2427 8484  
Hong Kong 7/F, Corporation Square, 8 Lam Lok Street, Kowloon Bay, Kowloon, Hong Kong  
澳門 澳門慕拉士大馬路 243 號富大工業大廈 4 樓 E 室 電話 Tel: (853) 2837 1777  
Macau Av. Venceslau de Morais 243 Ed. Ind. "Fu Tai" 4 Andar E, Macau  
網址 Website: www.mitsubishi-ryoden.com.hk

經銷商 Distributor:

