


[← Back](#)


CS 1212-1 I

## Electric CombiSet with induction with 2 cooking zones in different diameters for versatile cooking.

- Professional design - Ceramic glass with frame, 288 mm wide
- Particularly versatile - two cooking zones
- Easy and direct controls -operation via metal rotary dial control
- Broad performance spectrum -keeping warm function and TwinBooster [i](#)
- Very convenient, safe - operating and residual heat indicator





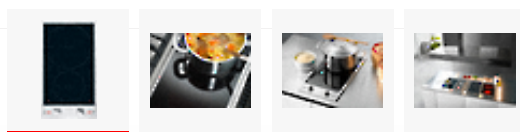





[More product information](#) [v](#)
Price: **HK\$ 20,000\***

Hong Kong retail price

[> Find a dealer](#)
 [Save & Compare](#) [> Appliance visualiser](#)

[Benefits](#)
[Product details](#)
[Downloads](#)
[Support & Service](#)
[Accessories](#)
[Miele Cleaning products at a glance](#)

## Product details - CS 1212-1 I

Heating type <a href="#">^</a>	
Heating type	Induction
Construction type <a href="#">^</a>	
CombiSet element	<a href="#">i</a>
Design <a href="#">^</a>	
Print design	LightPrint
All-round stainless steel frame	•
Miele logo embossed in stainless steel	•
Ring details <a href="#">^</a>	
No. of rings	2
Ring <a href="#">^</a>	
Position	front centre
Type	Dual-circuit ring
Diameter in mm	Ø 100-160
Power rating in W	1400
Booster in W	2200
Ring <a href="#">^</a>	
Position	rear centre
Type	Dual-circuit ring
Diameter in mm	Ø 160-230
Power rating in W	2300
Booster in W	3000
TwinBooster in W	3700
User convenience <a href="#">^</a>	
Operation via knobs	<a href="#">i</a>
Pan/Pan-size sensors	<a href="#">i</a>

AutoBoost	• 
Indicators <span style="float: right;">^</span>	
Residual heat indicator for every ring	• 
Digital power level display	•
Efficiency and sustainability <span style="float: right;">^</span>	
Residual heat utilisation	• 
Cleaning convenience <span style="float: right;">^</span>	
Easy to clean ceramic surface	• 
Safety <span style="float: right;">^</span>	
Safety cut-out	• 
Lock function	• 
System lock	• 
Fault monitoring	•
Integrated cooling fan	• 
Overheating protection	• 
Residual heat indicator	• 
Technical data <span style="float: right;">^</span>	
Dimensions in mm (width)	288
Dimensions in mm (depth)	520
Dimensions in mm (height)	57
Built-in height with mains connection box in mm	73
Cutout dimensions in mm (width)	272
Cutout dimensions in mm (depth)	500
Total connected load in kW	3,7
Weight in kg	8
Voltage in V	230
Fuse rating in A	16
Number of phases	1
Cable length in m	2,0
Standard accessories <span style="float: right;">^</span>	
Connection cable	•